


Specifications

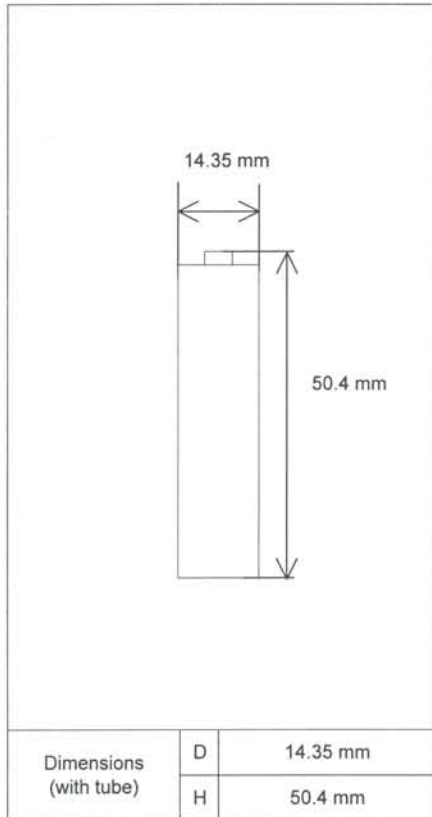

Type : Nickel-Metal Hydride Battery			Size : AA Consumer Type
Capacity 1)	Typical		2000mAh
	Minimum		1900mAh
Nominal Voltage			1.2V
Charging Current x Time		Fast Charge 2)	2000mA × 1.1h
Ambient Temp.	Charge Condition	Fast Charge 2)	0°C - 40°C
	Discharge Condition		0°C - 50°C
	Storage Condition	Less than 90days	-20°C - 40°C
		Less than 1year	-20°C - 30°C
Internal Impedance 3) (after discharge to E.V.=1.0V)			Approx. 25m Ω (at 1000Hz)
Weight 4)			Approx.27g
Size 4) : (Diameter) x (Height)			14.35(D) x 50.4(H) mm

1) Single cell capacity under the following condition.

Charge : 200mA×16h, Discharge : 400mA(E.V.=1.0V) at 25°C


2) Use recommended charging system.

3) After a few charge and discharge cycles under the above 1) condition.

4) With tube.

Typical Characteristics

Charge

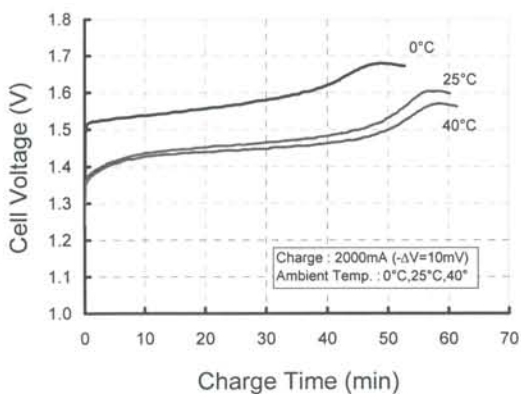

Discharge

